

Ultrapoly PEP

The silicone free Ultrapoly prefilter for the removal of solid contaminants in gases.

Product description:

The silicone free Ultrapoly prefilter contains the high porous, sintered polyethylene filter medium. Even finest dust particles and other contaminants in compressed air and gases are being removed effectively on the surface and in the depth of the filter medium.

Characteristics:

By utilising various filtration mechanisms – such as direct impact and sieve effect – contaminants down to the size of 25 µm particles, are being retained in the filter.



Cross section of the
Ultrapoly prefilter

Applications:

The Ultrapoly prefilter is for example being utilised in the following industries

- Automobile industry (applications of lacquer finishes)
- Chemical industry
- Petrochemical industry
- Pharmaceutical industry
- Plastic industry
- General machine fabrication
- Food industry
- Beverage industry
- Process industry for instrumentation and control air

Ultrapoly PEP

Features:	Benefits:
Permanent temperature range: -20°C up to +80°C	Broad application spectrum
Void volume: porosity grade 45%	High dirt holding capacity: lower differential pressure
Filter surface: 35 cm ² (02/05) up to 3100 cm ² (30/50)	Appropriate for any application and flow
Removal of contaminants down to 25 µm	Guaranteed retention grade
Regenerative	Economical, longer service life time

Materials :	
Filter medium	Pure, high molecular Polyethylene
Bonding	Polyurethane
End caps	Aluminium
2 O-Rings	Viton, labs-free


Retention rate:

100% in gases

Maximum differential pressure:

2 bar at 20°C, irrespective of system pressure

Performance of PEP elements- compressed air

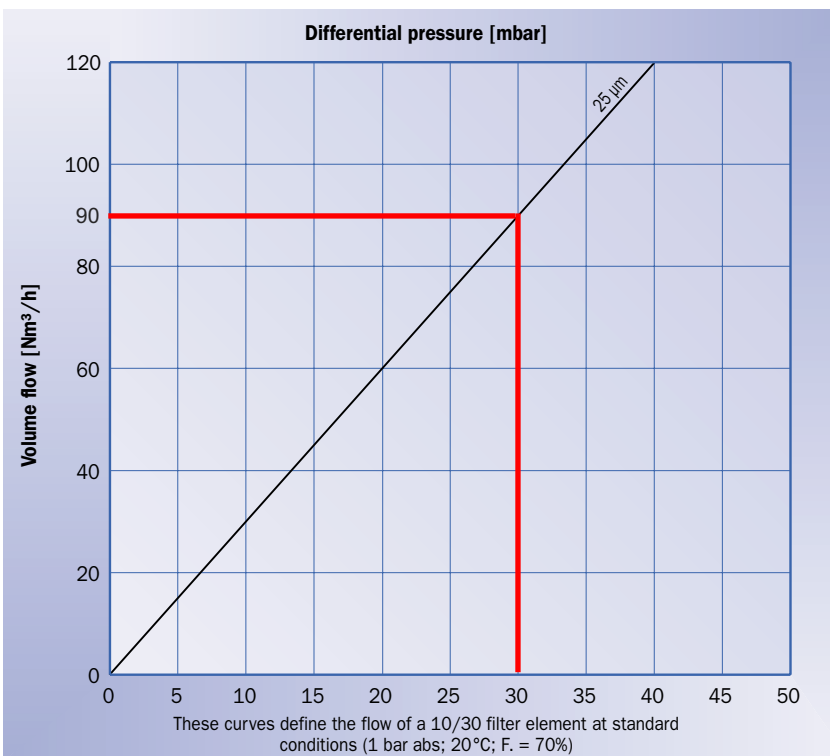

Initial differential pressure at nominal flow:

0.03 bar

Element-Type	Correction Factor Filter surface KF
02/05	0.08
03/05	0.10
03/10	0.12
04/10	0.17
04/20	0.19
05/20	0.25
05/25	0.32
07/25	0.47
07/30	0.68
10/30	1.0
15/30	1.55
20/30	2.10
30/30	3.20
30/50	5.65