


Donaldson Advanced AMC Filters

ChemCore™ B - Base Gas Filter, High Density Product Specifications


ChemCore “B” is an open channel* alternative to pleated and packed-bed carbon filters designed to remove sulphur dioxide (NH₃) and amines from ambient air.

ChemCore filtration media was specifically designed to control airborne molecular contamination (AMC) with a focus on low pressure drop, low weight and high removal efficiency. Filters are available in both standard and high density media formats. High density media has first pass efficiency and is suitable for most lithography and toolmount applications. Standard density media meets the weight and pressure drop required in most re-circulation systems.

For more general airborne molecular contamination (AMC) control, filters can be configured as ChemCore B alone or in combination with ChemCore A. ChemCore A is used for the control of acidic gases, such as Sulphur Dioxide (SO₂). See separate data sheet.

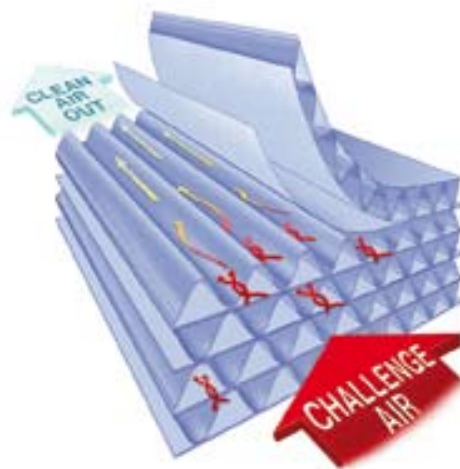

ChemCore’s chemically-treated filter material allows for filtration by diffusion.

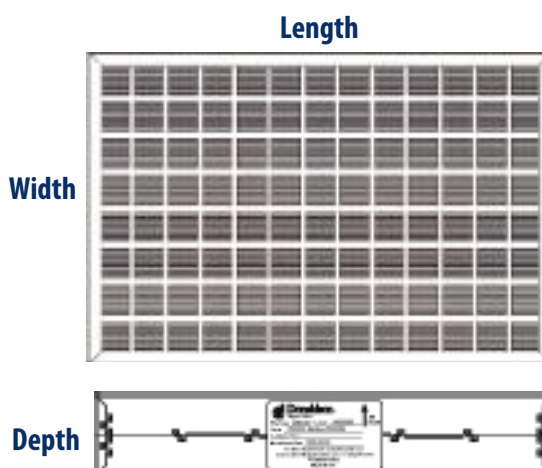

*To request a white paper that explains the benefits of open channel media, please contact us.

Part #	Width in mm	Length in mm	Depth in mm	Weight in kg
P512921	500	500	70	3.3
P512852	600	400	70	3.2
P512917	500	500	150	7.0
P521853	600	400	150	6.8
P512897	360	200	155	2.0
P513131	460	360	155	4.5
P512884	460	385	155	5.3
P513140	460	460	155	6.4
P512885	615	310	155	5.7
P513130	620	360	155	6.8
P512972	620	460	155	8.8
P512896	720	270	155	5.9
P512898	1120	400	155	14.7

Sizes listed are representative only. Call Donaldson regarding your specific requirements.




ChemCore™ B

Base Gas Filter, High Density


Performance Data

Base performance data at standard operation conditions (25°C, 50% RH and face velocity 0.5m/sec)

- Initial removal efficiency >99.9%
- Pressure drop <50 Pa (see first figure below)
- Estimated filter life >5 years (see second figure below)

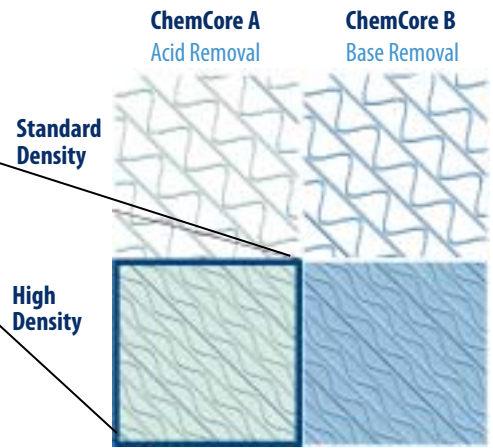


Face Velocity vs. Pressure Drop

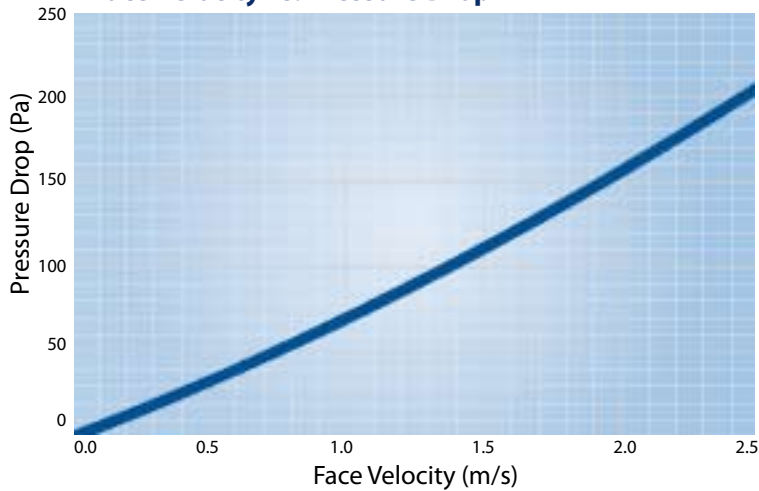

- 150mm filter depth
- High density media
- Typical velocity used in most applications is 0.5 m/s

Amine Filter Performance at 0.5 m/s

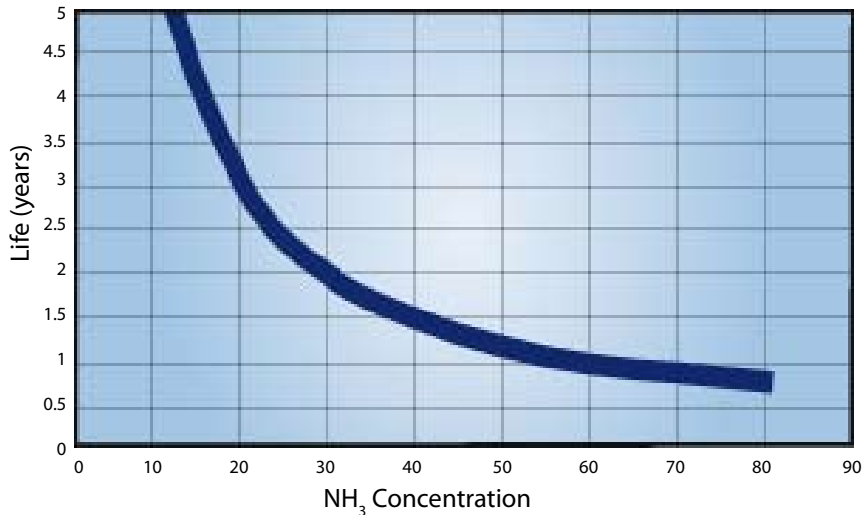

- High density media
- 95% efficiency as the end of life condition
- Typical fab condition = 10 - 20 ppb of NH₃

Contact us today!

Donaldson Europe BVBA
Research Park Zone 1
Interleuvenlaan 1
3001 - Leuven
BELGIUM

Tel: +32 16 38 37 10
Fax: +32 16 38 37 11

<http://www.emea.donaldson.com/en/semiconductor/index.html>

hpp-europe@emea.donaldson.com



Patents pending on ChemCore filter media

Donaldson Filter Components Limited 2008. All rights reserved.
 This publication is issued to provide outline information only which (unless agreed in writing by Donaldson Filter Components Ltd) may not be used, applied or reproduced for any purpose, or form part of any order or contract or be regarded as a representation relating to the product or service concerned.
 Donaldson Filter Components Ltd, reserves the right to alter without notice the specification, design or conditions of supply of any product or service.
 The Donaldson logo, LITHOGUARD and ChemCore are trademarks of Donaldson Company Inc.
 Publication Code: CCB001/EN/08/08 Printed in the UK